
Blind Flange RTJ

Category: API Standard Flanges · Availability: On Request · SKU: RND-FLG-BLIND-RTJ
Issued: 04 Nov 2026

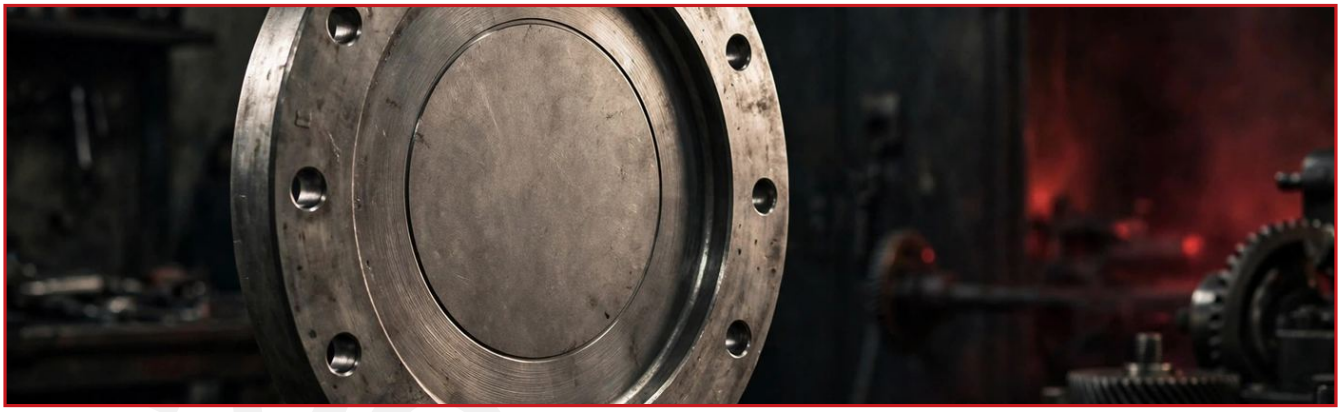

OVERVIEW

Blind flanges close off pipeline ends, vessel nozzles and wellhead outlets so lines can be isolated, pressure-tested and maintained safely. Our RTJ blind flanges carry a precision-machined ring groove for a metal-to-metal seal that holds at full system pressure, and are sourced to ASME B16.5 and API 6A in A105, LF2 and stainless grades. Raised-face and flat-face versions, hubbed blinds for frequent test points and custom thicknesses are all available on order. Tell us your line size and class — we will source the right blind with certificates.

TECHNICAL SPECIFICATIONS

Standard	ASME B16.5 / API 6A
Type	Blind flange, RTJ facing
Size Range	NPS 1/2 to 24 · 2-1/16 in to 21-1/4 in (API)
Pressure Rating	Class 150 to 2500 · 2,000 to 15,000 PSI (API)
Ring Groove	R, RX and BX ring grooves
Materials	ASTM A105, A350 LF2, A182 F316
Application	Pressure isolation, hydro-testing, blanking

HOW TO ORDER

Send your RFQ through rigndig.com/request-quote, by email to admin@rigndig.com or on WhatsApp +92 333 2594493. We confirm the best price, availability and lead time — sourcing begins only after you approve the quoted price.